

IN-100

Industrial High-Bay LED Light

Revision 2011

IP-rated LED industrial high-bay, 10 400 Lm at 100 W, universal 90-264 VAC with active PFC, UL1310 Class 2 driver.

Manufactured in-house at our SMT line.

DDM Novastar SPR-45 + LS60 + GF-120HT, AOI on every joint, per-unit calibration to NVRAM.



Energetika-VDS · Strumica, Macedonia · energetika-vds.com

Catalog detail on the following pages.

Industrial Light
Save energy consumption up to 75%
Type IN-100



Relative intensity $\pm 25^\circ$

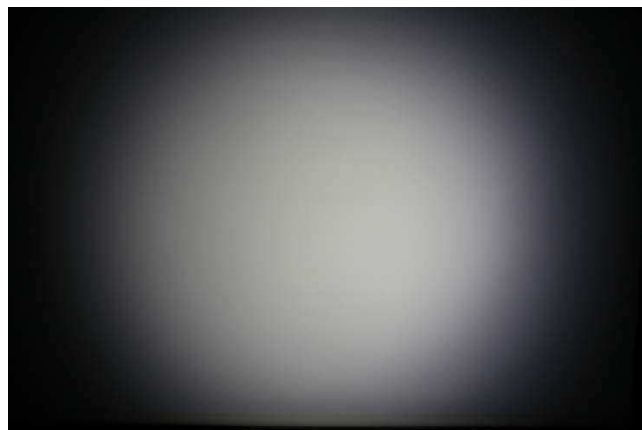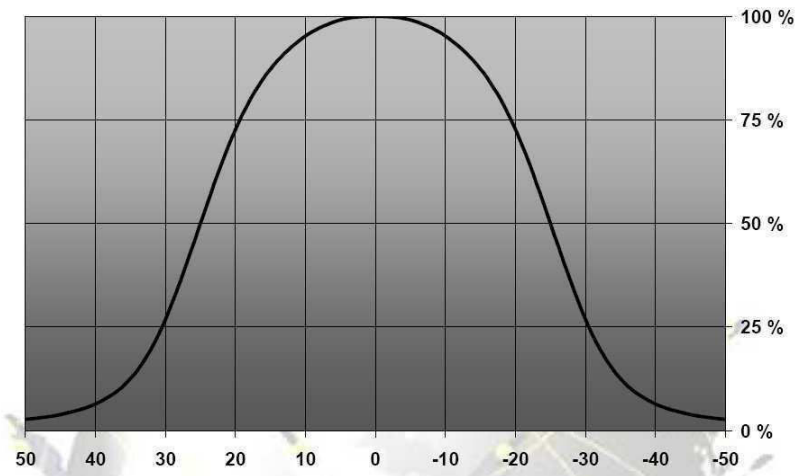

Universal AC input (90 – 264) VAC

Protections: Short circuit, Overload , Overvoltage , Overtemperature , re-power on to recover

Built-in active PFC function

Efficiency 87%

Working temperature (-20 to +50) °C

UL1310 Class 2 power unit

Viewing angle $\pm 7^\circ$, $\pm 9^\circ$, $\pm 15.5^\circ$, $\pm 25^\circ$

Output flux 10.400 Lm

Color Cool White CCT Range 6.650 K

Input power consumptions 100W