

RGB-30P

Submersible RGB LED Spotlight (IP68)

Revision 2011

IP68 submersible RGB LED spotlight, 630 Lm at 30 W max white, universal 90-264 VAC with active PFC, paired with C-300 software.

Manufactured in-house at our SMT line.

DDM Novastar SPR-45 + LS60 + GF-120HT, AOI on every joint, per-unit calibration to NVRAM.


[Energetika-VDS](#) · [Strumica, Macedonia](#) · [energetika-vds.com](#)

Catalog detail on the following pages.

RGB-30P



Relative intensity

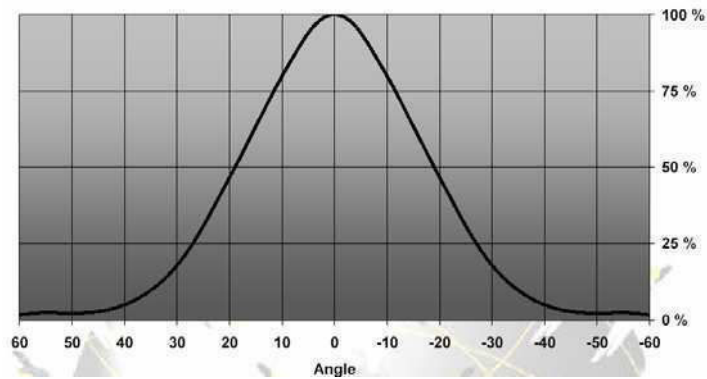

Univerzal AC input (90-264) V

Built-in active PFC function

Efficiency PF 87%

Output flux , 630 Lm

Protection IP 68

Viewing angle $\pm 8, \pm 11, \pm 18, \pm 23$

Power consumption 30W at max. white color

Color changing mode Red , Green , Blue , Stroboeffect, Light Show